
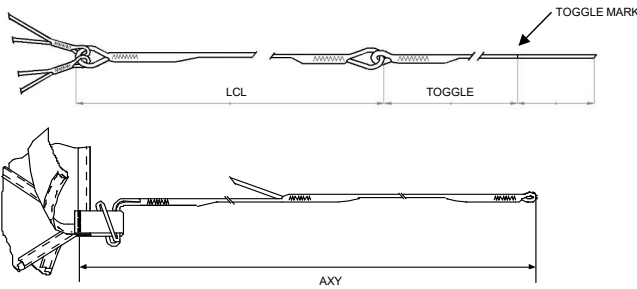


# PILOT 7

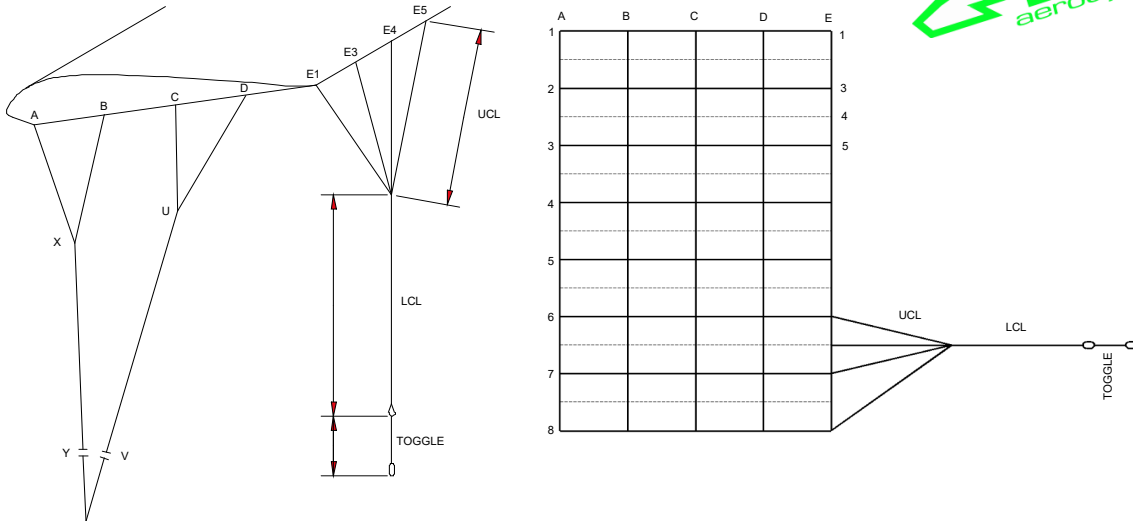

ENSURE LOOPS ARE HELD EVENLY AND SECURELY. EACH LINE TO BE LOADED TO 4.5KG DURING MEASUREMENT. MEASURE THE DEPLOYMENT BRAKE SETTING WITH THE TOGGLES STOWED. MEASURE THE FULL FLIGHT SETTING WITH THE TOGGLES UNSTOWED.

MEASURE FROM END OF SUSPENSION LINE LOOP TO BARTACK ON SUSPENSION LINE ATTACHMENT TAB.

STABILIZER FLOAT  
 A : 10  
 B : 20  
 C : 30

Canopy	117	137	147	167	187	207	227	247
AXY1	2450	2665	2850	3030	3195	3360	3525	3715
A1-B1	30	30	35	30	35	35	40	40
A1-C1	170	185	195	200	210	220	230	245
A1-D1	355	385	405	420	440	460	480	510
AXY2	2450	2665	2850	3030	3195	3360	3525	3715
A2-B2	35	40	45	40	45	45	50	55
A2-C2	200	215	230	235	245	265	270	290
A2-D2	420	450	480	495	520	545	570	605
AXY3	2450	2665	2850	3030	3195	3360	3525	3715
A3-B3	40	45	45	45	50	50	55	60
A3-C3	220	230	250	255	270	285	295	305
A3-D3	455	485	515	535	565	590	615	645
LCL	1810	1870	2025	2060	2155	2250	2420	2605
TOGGLE	500	530	480	510	700	730	575	600
ULC1	960	1025	1080	1140	1190	1245	1300	1360
UCL3	995	1060	1120	1180	1230	1287	1340	1400
UCL4	1050	1120	1180	1245	1300	1360	1410	1480
UCL5	1220	1300	1370	1440	1450	1514	1580	1650

All dimensions in mm

VER 0.1